Product Specifications

Model: D-8606T

Stainless Steel Keyboard With Touchpad

* USB cable not shown in product images. Actual product is supplied with USB cable assembly.

Main Feature

- 86+3 keys, Compact size , Real Panel mount.
- Protruding full travel(1.8mm)keys with
  Laser engraving graphics, excellent tactile feedback.
- Specially designed to operate in harsh environments, making it ideal for kiosks and other applications in public places.
- Built from 304 stainless steel, high vandal-proof
  Dust-proof and liquid-proof, meet IP65
- USB or PS/2 interface optional
- Can be customized different language layout, such as English, Spain, German, Italian, Korean, Arabic...etc

Dimension and Weight

- Dimension: Front panel 392*135mm
- Weight: 1.8 kg

Material

- Front panel & Keys: 304 stainless steel
- Back Panel: Aluminum alloy

Electrical Data

- Operating Voltage: 5 VDC (±5%)
- Working current: ≤50 mA
- Maximum power: ≤0.25 W
- ESD Protection: Contact ±6kV, Air ±8kV

Test Standard

- EN 55032:2015/AC:2016; EN 55035:2017
- EN IEC 61000-3-2:2019,
- EN 61000-3-3:2013/A1:2019

www.davokey.com

Environmental Characteristics

- Operating temperature: -40° C to + 70° C
- Storage temperature: - 40° C to + 80° C
- Operating RH: 30-90%
- Atmospheric pressure: 60-106Kpa.
- Saline mist: 100 hours, IEC 60512-6
- Damp heat test at + 40℃: 21 days, IEC 60512-6
- Dry heat test at + 85℃: 10 days, IEC 60512-6

Mechanical Data

- Key Size: 14 x 14mm for normal keys, 14 x 28mm for enter key, 14x 110mm for space Key
- Key travel: 1.8mm
- Key pressure: 1.5 N±0.2N
- Keyswitch Technology: Silicone conductive Carbon Pills
- Protection Level: IP65
- Vandal resistant IK08
- Key Lifespan >2 million actuations

Compatible Operation system

- Windows / Linux / Android / Mac OS

www.davokey.com

DIMENSIONAL DRAWING

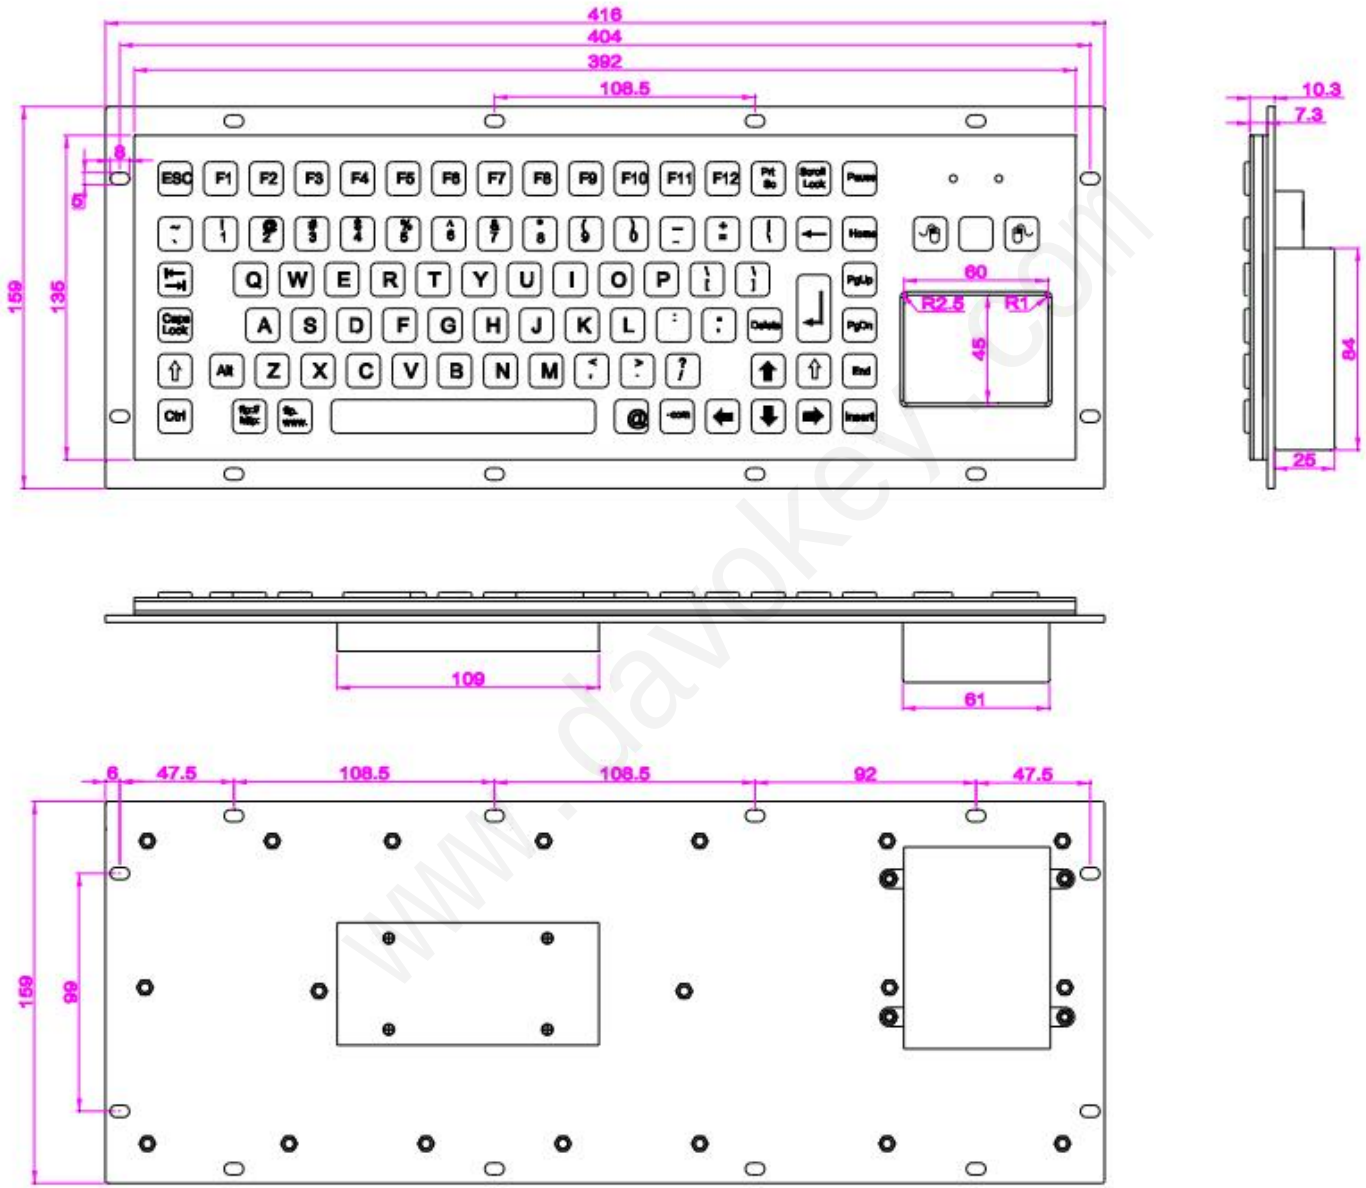

www.davokey.com

• www.davokey.com • Tel: +86 133 2293 9163 • Contact: Kevin Deng • Email: kevin.deng@sz-davo.com

Real-World Application

Oil Drilling Control Console